



## SRK25ZTX-WA / SRC25ZTX-WA

2.5 (0.9~3.8)

Indoor Unit : SRK25ZTX-WA

Outdoor Unit : SRC25ZTX-WA


### Specifications

R32


|  |                         |   |                         |
|--|-------------------------|---|-------------------------|
| Indoor unit                                      |                         | SRK25ZTX-WA   |                         |
| Outdoor unit                                     |                         | SRC25ZTX-WA   |                         |
| Power source                                     |                         | 1 Phase, 220 - 240V, 50Hz / 220V, 60Hz                                    |                         |
| Nominal cooling capacity (Min~Max)               |                         | kW  | 2.5 (0.9~3.8)           |
| Nominal heating capacity (Min~Max)               |                         | kW  | 3.2 (0.9~7.8)           |
| Power consumption                                | Cooling/Heating         | kW  | 0.45 / 0.59             |
| EER/COP  | Cooling/Heating         |   | 5.56 / 5.42             |
| Max. running current                             |                         | A   | 14.5                    |
| Sound power level                                | Indoor                  | Cooling/Heating   | 54 / 55                 |
|  | Outdoor                 | Cooling/Heating   | 55 / 57                 |
| Sound pressure level                             | Indoor                  | Cooling (Hi/Me/Lo/Ulo)  | 39 / 33 / 25 / 19       |
|  |                         | Heating (Hi/Me/Lo/Ulo)  | 41 / 34 / 27 / 19       |
|  | Outdoor                 | Cooling/Heating   | 44 / 45                 |
| Air flow   | Indoor                  | Cooling (Hi/Me/Lo/Ulo)  | 11.7 / 9.6 / 6.4 / 4.8  |
|  |                         | Heating (Hi/Me/Lo/Ulo)  | 14.8 / 11.0 / 7.8 / 5.4 |
|  | Outdoor                 | Cooling/Heating   | 31.0 / 31.0             |
| Exterior Dimensions                              | Indoor                  | Height x Width x Depth  | 305 x 920 x 220         |
|  | Outdoor                 |   | 640 x 800 (+71) x 290   |
| Net weight                                       | Indoor / Outdoor        | kg  | 13.0 / 45.0             |
| Refrigerant                                      | Type/GWP                |   | R32 / 1.25              |
| Refrigerant                                      | Charge                  | kg/TCO2Eq   | 1.25                    |
| Refrigerant piping size                          | Liquid/Gas              | mm (ø inch)   | 6.35(1/4") / 9.52(3/8") |
| Refrigerant line (one way) length                |                         | m   | Max.25                  |
| Vertical height differences                      | Outdoor is higher/lower | m   | Max.15 / Max.15         |
| Outdoor operating temperature range              | Cooling                 | °C  | -15~46°C                |
|  | Heating                 |   | -25~24°C                |
| Clean filter                                     |                         | Allergen Clear Filter x 1, Photocatalytic Washable Deodorizing Filter x 1 |                         |
| Energy Class (Cooling/Heating)                   |                         | A+++/A+++   |                         |
| SEER   |                         | 9.50  |                         |
| SCOP (Average climate)                           |                         | 5.20  |                         |
| Pdesign (cooling/heating(@-10°C))                |                         | kW  | 2.50/3.00               |
| Annual Electricity Consumption (cooling/heating) |                         | kWh/a   | 93/808                  |
| Designated Heating Season                        |                         | Average   |                         |

- The data is measured under the following conditions(ISO-T1, H1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
- Sound level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.
- 'tonne(s) of CO2 equivalent' means a quantity of greenhouse gases- expressed as the product of the weight of the greenhouse gases in metric tonnes and of their global warming potential.



Schematics

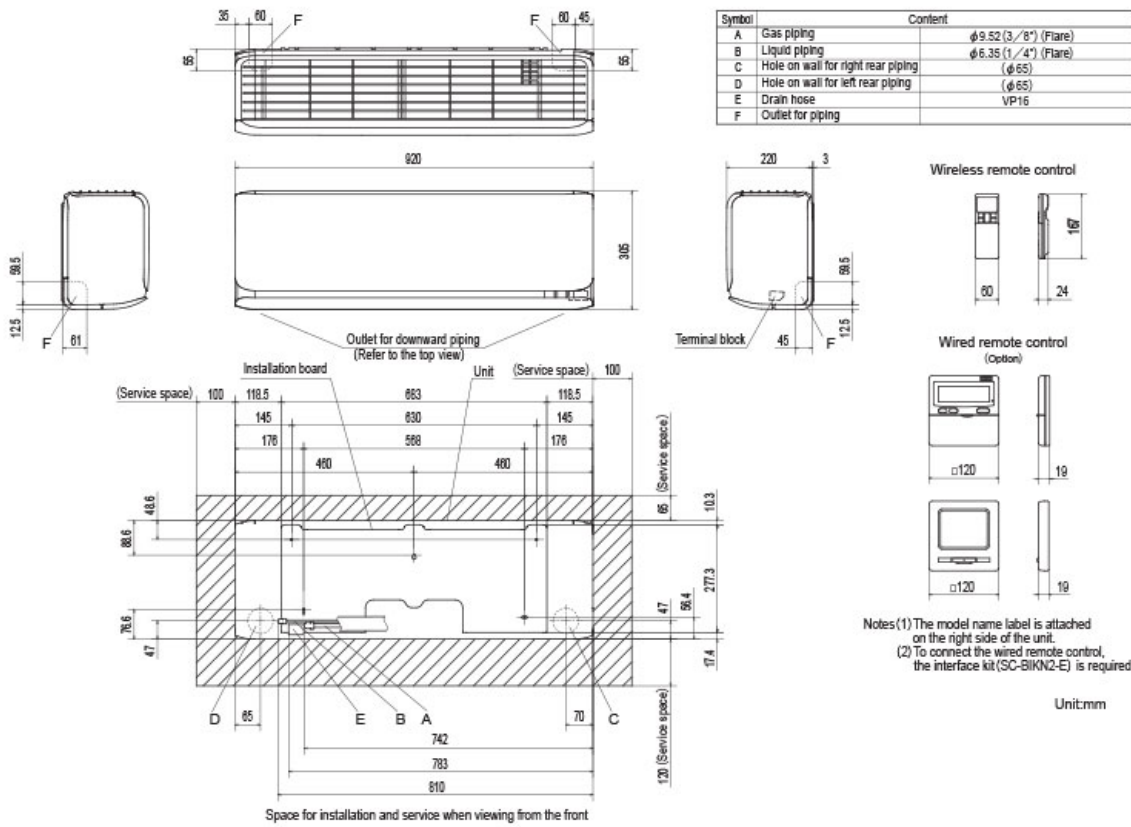

(1) Indoor units  
 Models SRK20ZTX-WA, 25ZTX-WA, 35ZTX-WA

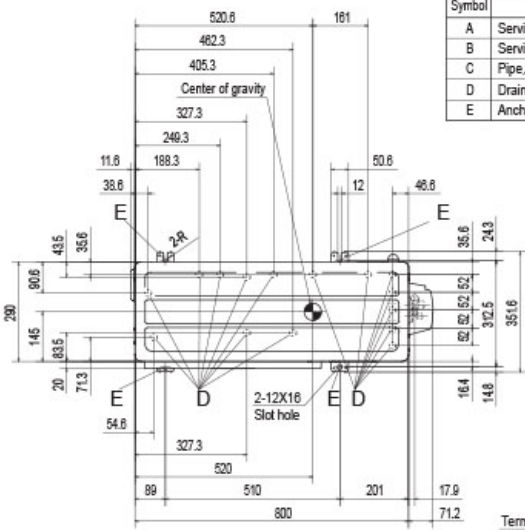


| Symbol | Content   |
|--------|---|
| A      | Service valve connection (gas side) $\phi 9.52(3/8)$ (Flare)    |
| B      | Service valve connection (liquid side) $\phi 6.35(1/4)$ (Flare) |
| C      | Pipe/cable draw-out hole  |
| D      | Drain discharge hole $\phi 20 \times 15$ places                 |
| E      | Anchor bolt hole M10-12 $\times 4$ places                       |

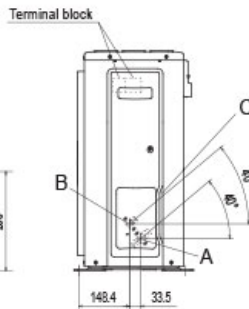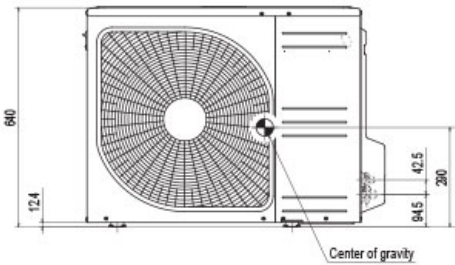

Notes

- (1) The unit must not be surrounded by walls on the four sides.
- (2) The unit must be fixed with anchor bolts. An anchor bolt must not protrude more than 15mm.
- (3) If the unit is installed in the location where there is a possibility of strong winds, place the unit such that the direction of air from the outlet gets perpendicular to the wind direction.
- (4) Leave 200mm or more space above the unit.
- (5) The wall height on the outlet side should be 1200mm or less.
- (6) The model name label is attached on the right side of the unit.

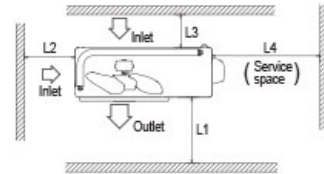

Minimum installation space

| Example installation | I    | II   | III  | IV   |
|----------------------|------|------|------|------|
| Size                 |      |      |      |      |
| L1                   | Open | 280  | 280  | 180  |
| L2                   | 100  | 75   | Open | Open |
| L3                   | 100  | 80   | 80   | 80   |
| L4                   | 250  | Open | 250  | Open |

Unit:mm

(2) Outdoor units  
Model is SRC20ZTX-WA, 25ZTX-WA, 35ZTX-WA