



SRK60ZSX-W / SRC60ZSX-W3

6.1 (1.0~6.9)

Indoor Unit : SRK60ZSX-W

Outdoor Unit : SRC60ZSX-W3

Specifications



R32

Indoor unit		SRK60ZSX-W	
Outdoor unit		SRC60ZSX-W3	
Power source		1Phase, 220 - 240, 50Hz	
Nominal cooling capacity (Min~Max)		kW	6.1 (1.0~6.9)
Nominal heating capacity (Min~Max)		kW	6.8 (0.8~8.8)
Power consumption	Cooling/Heating	kW	1.71 / 1.65
EER/COP	Cooling/Heating		3.57 / 4.12
Max. running current		A	15
Sound power level	Indoor	Cooling/Heating	62 / 63
	Outdoor	Cooling/Heating	65 / 64
Sound pressure level	Indoor	Cooling (Hi/Me/Lo/Ulo)	48 / 41 / 33 / 22
		Heating (Hi/Me/Lo/Ulo)	47 / 42 / 34 / 23
	Outdoor	Cooling/Heating	52 / 53
Air flow	Indoor	Cooling (Hi/Me/Lo/Ulo)	16.3 / 13.4 / 8.9 / 5.4
		Heating (Hi/Me/Lo/Ulo)	17.8 / 13.7 / 10.9 / 6.2
	Outdoor	Cooling/Heating	41.5 / 39.0
Exterior Dimensions	Indoor	Height x Width x Depth	305 x 920 x 220
	Outdoor		640 x 800(+71) x 290
Net weight	Indoor / Outdoor	kg	13.0 / 45.0
Refrigerant	Type/GWP		R32 / 675
Refrigerant	Charge	kg/TCO2Eq	1.30 / 0.878
Refrigerant piping size	Liquid/Gas	mm (ø inch)	6.35(1/4") / 12.7(1/2")
Refrigerant line (one way) length		m	Max.30
Vertical height differences	Outdoor is higher/lower	m	Max.20 / Max.20
Outdoor operating temperature range	Cooling	°C	-15~46
	Heating		-20~24
Clean filter		Allergen Clear Filter x 1, Photocatalytic Washable Deodorizing Filter x 1	
Energy Class (Cooling/Heating)		A++/A++	
SEER		7.80	
SCOP (Average climate)		4.70	
Pdesign (cooling/heating(@-10°C))		kW	6.10/5.20
Annual Electricity Consumption (cooling/heating)		kWh/a	274/1551
Designated Heating Season		Average	

- The data is measured under the following conditions(ISO-T1, H1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
 - Sound level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.
 - 'tonne(s) of CO2 equivalent' means a quantity of greenhouse gases- expressed as the product of the weight of the greenhouse gases in metric tonnes and of their global warming potential.
- *1 The maximum external static pressure can be used up to 35Pa (25•35ZS) , 50Pa (50 •60ZS), but the airflow will be reduced.


Schematics

**SRK20ZSX-W, -WB, -WT SRK25ZSX-W, -WB, -WT
SRK35ZSX-W, -WB, -WT SRK50ZSX-W, -WB, -WT
SRK60ZSX-W, -WB, -WT**

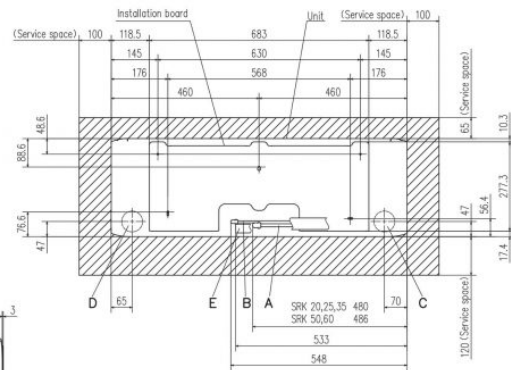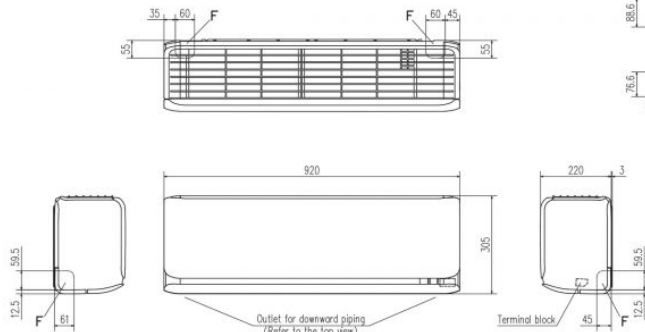

Space for installation and service when viewing from the front


Symbol	Content
A	Gas piping SRK 20,25,35 480 SRK 50,60 486 #9.52 (3/8") (Flare)
B	Liquid piping #6.35 (1/4") (Flare)
C	Hole on wall for right rear piping (ø65)
D	Hole on wall for left rear piping (ø65)
E	Drain hose VP16
F	Outlet for piping

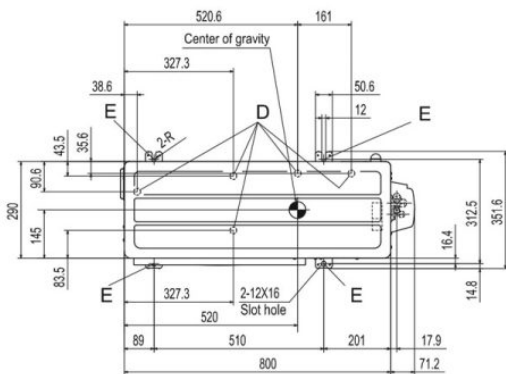

Symbol	Content
A	Service valve connection (Gas side) $\phi 12.7 (1/2")$ (Flare)
B	Service valve connection (Liquid side) $\phi 6.35 (1/4")$ (Flare)
C	Pipe/cable draw-out hole
D	Drain discharge hole $\phi 20 \times 5$ places
E	Anchor bolt hole M10-12 $\times 4$ places


Notes

- (1) The unit must not be surrounded by walls on the four sides.
- (2) The unit must be fixed with anchor bolts. An anchor bolt must not protrude more than 15mm.
- (3) If the unit is installed in the location where there is a possibility of strong winds, place the unit such that the direction of air from the outlet gets perpendicular to the wind direction.
- (4) Leave 200mm or more space above the unit.
- (5) The wall height on the outlet side should be 1200mm or less.
- (6) The model name label is attached on the front side of the unit.



Minimum installation space

Examples installation	I	II	III	IV
Size				
L1	Open	280	280	180
L2	100	75	Open	Open
L3	100	80	80	80
L4	250	Open	250	Open

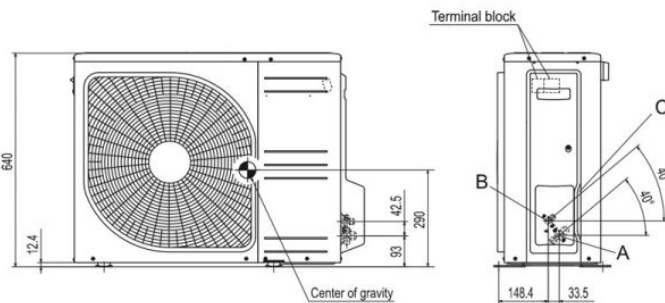

Unit:mm

**(2) Outdoor units
Models SRC50ZSX-W3, 60ZSX-W3**